



PRODUCT RANGE

Brass, Bronze, Cast Iron, Cast Steel,
Forged Steel & Stainless Steel

VALVES
WATER METERS
& FLOW METERS



Approvals & Testimonials



PUNJAB WATER SUPPLY AND
SEWERAGE BOARD



Public Health Engineering Department
Government of West Bengal



SiTarc®



PV-403A

Cast Iron
BUTTERFLY VALVE
PN 16
Short Wafer Type
Lever Operated
S.G. Iron Disc

Size Range:
40mm to 300mm



IS:13095
MARKED

PV-403E

Cast Iron
BUTTERFLY VALVE
PN 16
Lever Operated
S.S. 316 Disc
CF-8M

Size Range:
40mm to 300mm



IS:13095
MARKED

PV-403B

Cast Iron
BUTTERFLY VALVE
PN 16
Short Wafer Type
Gear Operated
S.G. Iron Disc

Size Range:
40mm to 600mm



IS:13095
MARKED

PV-403F

Cast Iron
BUTTERFLY VALVE
PN 16
Short Wafer Type
Lever Operated
S.S. 316 Disc
CF-8M

Size Range:
40mm to 600mm



IS:13095
MARKED

PV-403C

Cast Iron
BUTTERFLY VALVE
PN 16
Short Wafer Type
Lever Operated
S.S. 304 Disc
CF-8

Size Range:
40mm to 300mm



IS:13095
MARKED

PV-403G

Cast Iron
BUTTERFLY VALVE
4 LUGS PN 16
Short Wafer Type
Lever Operated
S.S. 304 Disc
CF-8

Size Range:
40mm to 300mm



IS:13095
MARKED

PV-403D

Cast Iron
BUTTERFLY VALVE
PN 16
Short Wafer Type
Gear Operated
S.S. Disc 304 CF-8

Size Range:
40mm to 600mm



IS:13095
MARKED

PV-403H

Cast Iron
BUTTERFLY VALVE
PN 16
Flanged Type
Gear Operated

Size Range:
40mm to 300mm



IS:13095
MARKED

PV-403J

Cast Iron
BUTTERFLY VALVE
PN 16
Short Wafer Type
With Pneumatic Actuator
S.S. 304 Disc CF-8

Size Range:
40mm to 300mm



PV-415

SG Iron
WAFLER TYPE
CHECK VALVE
PN 16
Wafer Type
S.G. Iron Flap

Size Range:
40mm to 300mm



PV-403K

Cast Iron
BUTTERFLY VALVE
PN 16
Short Wafer Type
With Electric Actuator
S.S. 304 Disc CF-8

Size Range:
40mm to 300mm



PV-417

Cast Iron
"T" TYPE STRAINER
PN 16
S.S. 304 Mesh
Flanged Ends

Size Range: 40mm to 300mm



PV-404A

Cast Iron
DUAL PLATE
CHECK VALVE
PN 16
S.G. Iron Flap
Non Return Valve

Size Range:
50mm to 300mm



PV-405

Cast Iron
BALL VALVE PN 16
Screwed Ends
2 Pc. Design



Size Range: 15mm to 100mm



PV-404B

Cast Iron
DUAL PLATE
CHECK VALVE
PN 16
S.S. 304 Flap
Non Return Valve

Size Range:
50mm to 300mm



PV-406

Cast Iron
BALL VALVE PN 16
3Pc.
Design
Flanged



Size Range: 15mm to 150mm



PV-407

Cast Iron
"Y" TYPE STRAINER
PN 16
Screwed Female Ends
S.S. 304 Mesh



Size Range:
15mm to 100mm

PV-418

Cast Iron
"Y" TYPE
STRAINER TABLE-E
PN 16
S.S. 304 Mesh
Flanged Ends



Size Range: 40mm to 300mm

PV-408

Cast Iron
"Y" TYPE
STRAINER
PN 16
Flanged Ends
S.S. 304 Mesh



Size Range: 40mm to 300mm

PV-416

Ductile Iron
RESILIENT SEATED
GATE VALVE
PN 16
Flanged Ends
as per IS 1538



Size Range:
50mm to 300mm

PV-401A

Cast Iron
SLUICE VALVE PN 16
Non Rising Spindle
Bronze Working Parts
S.S. 410 Spindle



Size Range:
50mm to 600mm



PV-416A

Ductile Iron
SOFT SEATED
GATE VALVE
PN 16
Flanged Ends
as per IS 1538



Size Range:
50mm to 300mm

PV-401B

Cast Iron
SLUICE VALVE PN 16
Bolted Bonnet
Rising Spindle



Size Range:
50mm to 300mm



PV-402A

Cast Iron
NON RETURN
VALVE PN 16
Swing Type



Size Range:
50mm to 300mm



PV-409

Cast Iron
SINGLE AIR VALVE
As per IS:14845
with S.S. Ball



Size Range:
40mm to 150mm

PV-411A

Cast Iron
**KINETIC AIR VALVE
NON TAMPERED TYPE**
As per
IS 14845
with S.S. Ball



Size Range: 80mm to 100mm

PV-410

Cast Iron
DOUBLE AIR VALVE
As per IS:14845
with S.S. Ball
Isolating Type



Size Range:
40mm to 150mm

PV-419

S.S.
304 BALL VALVE
Screwed Ends
2 Pc. Design



Size Range: 15mm to 50mm

PV-410A

Cast Iron
DOUBLE AIR VALVE As per IS 14845



Size Range: 40mm to 150mm

PV-420

S.S.
304 BALL VALVE
3 Pc. Design
Flanged
Ends



Size Range:
15mm to 100mm

PV-411

Cast Iron
KINETIC AIR VALVE
As per IS 14845
with S.S. Ball



Size Range:
25mm to 200mm

PV-421

S.S.
316 BALL VALVE
Screwed Ends
2 Pc. Design



Size Range: 15mm to 50mm

PV-422

S.S.
316 BALL VALVE
3 Pc. Design
Flanged
Ends



Size Range:
15mm to 100mm

PV-431

Forged Steel
GATE VALVE
Class 800
Socket / Screwed



Size Range:
15mm to 50mm

PV-423

S.S.
GLOBE STEAM VALVE
Screwed



Size Range:
15mm to 50mm

PV-432

Forged Steel
GLOBE VALVE
Class 800
Socket / Screwed



Size Range:
15mm to 50mm

PV-424

S.S.
MULTI - CHECK VALVE
Screwed



Size Range:
15mm to 100mm

PV-433

Forged Steel
CHECK VALVE
Class 800
Socket / Screwed



Size Range:
15mm to 50mm

PV-425

S.S.
STRAINER 'Y' TYPE
Screwed



Size Range:
15mm to 100mm

PV-434

Forged Steel
PISTON VALVE
Class 150 & Class 300
Flanged



Size Range:
15mm to 200mm

PV-412

Cast Iron
**BALL TYPE
FOOT VALVE**



Size Range:
50mm to 200mm

PV-103A

Cast Iron
**HORIZONTAL LIFT
CHECK VALVE
PN 16
Flanged Ends**



Size Range:
15mm to 200mm

PV-426

S.S. 304
**FIRE HYDRANT
VALVE
Flanged**



Size Range:
80mm Inlet 60mm Outlet

PV-104

Cast Iron
**ANGLE LIFT
CHECK VALVE
PN 16
Flanged Ends**



Size Range:
15mm to 150mm



PV-101A

Cast Iron
**GLOBE VALVE
PN 16
Flanged Ends**



Size Range:
15mm to 200mm



PV-105

Cast Iron
**ACCESSIBLE FEED
CHECK VALVE
PN 16
Flanged Ends
Right Angle Pattern**



Size Range:
25mm to 65mm



PV-102A

Cast Iron
**ANGLE GLOBE VALVE
PN 16
Flanged Ends
Right Angle Pattern**



Size Range:
25mm to 150mm

PV-106

Cast Iron
**SWING CHECK
VALVE
PN 16
Flanged Ends**



Size Range:
40mm to 200mm



PV-107

Cast Iron
**"Y" TYPE
STRAINER**
PN 16
Screwed Ends



Size Range:
15mm to 50mm



PV-110

Cast Iron
MOISTURE SEPARATOR
Horizontal Type



Size Range:
25mm to 100mm

PV-108

Cast Iron
**"Y" TYPE
STRAINER**
PN 16
Flanged Ends




Size Range:
25mm to 150mm



PV-112

SG Iron
FULL LIFT SAFETY VALVE
Spring Loaded Safety Valve
Angle Pattern



Size Range:
25x40mm to 50x80mm

PV-109

Cast Iron
**INVERTED
STEAM TAP**
Vertical Type



Size Range:
15mm to 50mm

PV-301

S.S.
**THERMODYNAMIC
STEAM TRAP**



Size Range:
15mm to 25mm



PV-109A

Cast Iron
**INVERTED
STEAM TRAP**
Horizontal Type



Size Range: 15mm to 50mm



PV-201

Cast Steel
GLOBE VALVE
PN 40
Flanged Ends



Size Range:
15mm to 200mm



PV-202

Cast Steel
**ANGLE GLOBE VALVE
PN 40**

Right Angle,
Flange Ends

Size Range:
25mm to 150mm



PV-206

Cast Steel
**SLEEVE PACKED
WATER LEVEL GAUGE
Flanged Ends**



Size Range:
20mm



PV-203

Cast Steel
**HORIZONTAL LIFT
CHECK VALVE
PN 40**

Flanged Ends

Size Range:
15mm to 200mm



PV-207

Cast Carbon Steel
**"Y" TYPE
STRAINER
PN 40**

Flanged Ends
with 304 Strainer

Size Range:
40mm to 150mm



PV-204

Cast Steel
**ANGLE LIFT
CHECK VALVE
PN 40**

Flanged Ends

Size Range:
25mm to 150mm



PV-208

Cast Carbon Steel
**ACCESSIBLE FEED
CHECK VALVE PN 40**

Right Angle Pattern
Flanged Ends

Size Range:
40mm to 80mm



PV-205

Cast Steel
**PARALLEL SLIDE
BLOW OFF VALVE**
Rack & Pinion
operated with key

Size Range:
25mm to 65mm



PV-209 Cast Carbon Steel
MOISTURE SEPERATOR

Size Range: 25mm to 100mm



PV-210

Cast Carbon Steel
BALL VALVE
3 Pc. Design
Screwed



Size Range: 15mm to 50mm



PV-212

Cast Steel
GATE VALVE
BS 1414
Straight Pattern,
Bolted Cover



Size Range:
40mm to 200mm

PV-211

Cast Carbon Steel
BALL VALVE
3 Pc.
Design
Flanged



Size Range: 15mm to 50mm



PV-213

Cast Steel
GLOBE VALVE
Flanged Ends



Size Range:
25mm to 100mm

PV-216

Cast Carbon Steel
FULL LIFT SAFETY VALVE
Right Angle Pattern
Bolted Cover
Spring Loaded



Size Range:
25X40mm to 80X100mm

PV-214

Cast Steel
HORIZONTAL LIFT CHECK VALVE
Flanged Ends



Size Range:
25mm to 100mm

PV-414

Bronze Sleeve
PACKED WATER LEVEL GAUGE
Flanged



Size Range:
15mm to 20mm



PV-215

Cast Steel
SWING CHECK VALVE
Flanged Ends



Size Range:
40mm to 200mm

AMR/AMI SOLUTION

Multijet, Dry Dial
WATER METER

every drop counts...
WATER METERS



**KAM-G
CLASS-A
WATER METER**
Multi jet Dry Dial
Inferential Type



Size Range:
15mm to 50mm



**KBM-G
CLASS-B
WATER METER**
Multi jet Dry Dial
Inferential
Type



Size Range:
15mm to 50mm



**KBS
CLASS-B
WATER METER**
Single jet Dry Dial
Magnetic
Transmission
Vacuum Sealed
Register



Size Range: 15mm



**KBM
CLASS-B
WATER METER**
Multi jet Dry Dial
Vacuum Sealed
Register
Magnetic
Transmission



Size Range: 15mm to 20mm



**ULTRA-G
CLASS-B
WATER METER**
Multijet, Dry Dial
IP 68 Copper
Can Register
DJB Approved



Size Range:
15mm to 20mm



**KBM-G+
CLASS-B
WATER METER**
Multijet, Dry Dial
IP 68
DJB Approved



Size Range:
15mm



**ULTRA-G SMART
CLASS-B
AMR COMPATIBLE
WATER METER**
Multijet, Dry Dial
Plastic/Copper Can
IP 68



Size Range: 15mm to 40mm



**ULTRA-G SMART
CLASS-B
AMR WATER METER**
Multijet, Dry Dial
Plastic/Copper Can
IP 68



Size Range: 15mm to 40mm



**KBM-G1
CLASS-B
WATER METER**

Multijet,
Dry Dial
BMS
Compatible
IP 68
Size Range:
15mm to 40mm



**KBH
CLASS -B
HOT
WATER METER**

Multi jet Dry Dial
Temp. upto 90°C.
IP 68

Size Range:
15mm to 50mm



**RITE
CLASS-B
WATER METER**

Multi jet Dry Dial

Size Range:
15mm



**KRP-C
CLASS-C
VOLUMETRIC
ROTARY PISTON
WATER METER**

Liquid Sealed
register

Size Range: 15mm to 20mm



**KWM
BULK WATER METER**

WOLTMAN TYPE
for COLD WATER
As per ISO 4064
Temp. 45°C Max.

Size Range:
40mm to 600mm



**KWM
BULK WATER METER**

WOLTMAN TYPE
for HOT WATER
As per ISO 4064
Temp. 90°C Max.

Size Range:
40mm to 200mm



**ELECTROMAGNETIC
FLOW METER
PTFE / Rubber
Liner**

Size Range:
15mm to 1200mm



**S.S. 304 / 316
TURBINE OIL
FLOW METER
24V DC**

Size Range:
15mm to 150mm



**K-FLOW
WOLTMANN
WATER METER**

As per ISO 4064
MID marked
Copper Can
Register

Size Range:
50mm to 300mm



ACCESSORIES



**ULTRASONIC
WATER METER
Screwed**

As per ISO 4064
IP 68
Digital Display

Size Range:
15mm to 40mm




**ULTRASONIC WATER METER
Flanged In built GSM**



Size Range: 50mm to 300mm

**TEST BENCH
For
WATER METER**

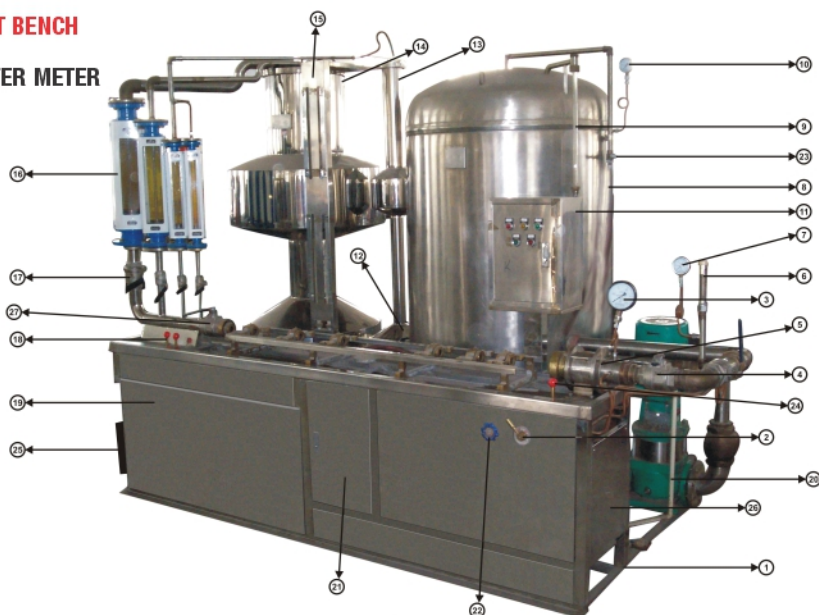



Brass, Bronze, Cast Iron, Cast Steel,
Forged Steel & Stainless Steel

VALVES
WATER METERS
& FLOW METERS



AMAN ENGINEERING WORKS

C 54-55, Focal Point Extension,
Jalandhar-144 004, Punjab India.
Ph.: 91-181 2603614, 615, 616
E mail: Info@krantimeters.com
visit us at : www.krantimeters.com

PARAS VALVES PVT. LTD.

101, KRANTI Industrial Area,
Gadaipur, Jalandhar 144 001 India.
Ph.: +91 181 2603614, 15, 16
E mail : info@krantigroups.in
E mail : paras.valves@gmail.com